


<u>Part Number:</u>	2312
<u>Configuration:</u>	¾"- ¾" MNPT Immersion Integrated Slurry / Viscous Resistant pH Sensor
<u>General Specifications:</u>	
<u>pH Range:</u>	0 to 14 pH
<u>Temperature Range:</u>	5 to 70 ° C
<u>Pressure Range:</u>	1 to 60 psig (6.9 to 414 kPag)
<u>Body Material:</u>	Chlorinated-Polyvinyl-Chloride (CPVC)
<u>Junction Material:</u>	Porous PolyEthylene (PE)
<u>Dimensions:</u>	Drawing <6-10>
<u>Cable:</u>	RG 174/U Coaxial; 10 feet of cable standard
<u>Connector:</u>	Male BNC (unless otherwise specified)
<u>pH Sensor Specifications:</u>	
<u>Measuring Glass Type:</u>	Flat Green Glass (MUGG)
<u>Dimensions:</u>	0.310, (7.8 mm) DIA
<u>Initial Impedance:</u>	Less than 800 M Ohms @ 25 ° C
<u>Sodium Ion Error:</u>	Less than 0.15 pH in 1.0 M Na ⁺ Concentration at pH 14.00
<u>Acidic Error:</u>	Less than 0.05 pH in 1.0 M HCl @ 0.00 pH
<u>Reference System Specifications:</u>	
<u>Type:</u>	Double Junction
<u>Reference Half Cell:</u>	Ag/AgCl, Saturated KCl
<u>Primary Junction:</u>	Porous Ceramic, Saturated KCl in crosslinked polymer
<u>Secondary Junction:</u>	Porous Polyethylene, Saturated with KCl in crosslinked polymer
<u>Surface Area:</u>	554,000 mil ² (357 mm ²)
<u>Special Features:</u>	Crosslinked non-porous ionically conductive polymer is resistant to heat, solvents and to most chemicals. Sensor holds an excess of KCl, assuring saturation at all temperatures and extending in situ sensor life. The reference system holds a supply of aqueous saturated KCl, eliminating effects of intruding contaminants and can permit the sensor to be left in dry condition for prolonged periods of time.
<u>Recommended Applications:</u>	Plating baths, plating wastewater treatment, chemical processes, pollution control, measurements where long service life or operation at remote locations where (no) low maintenance is required.
<u>Storage and Shelf Life:</u>	At room temperature with closed protector cap, 1 year from date of manufacture.

1 2 3 4

REV		DESCRIPTION	DATE	APPROVED
1				

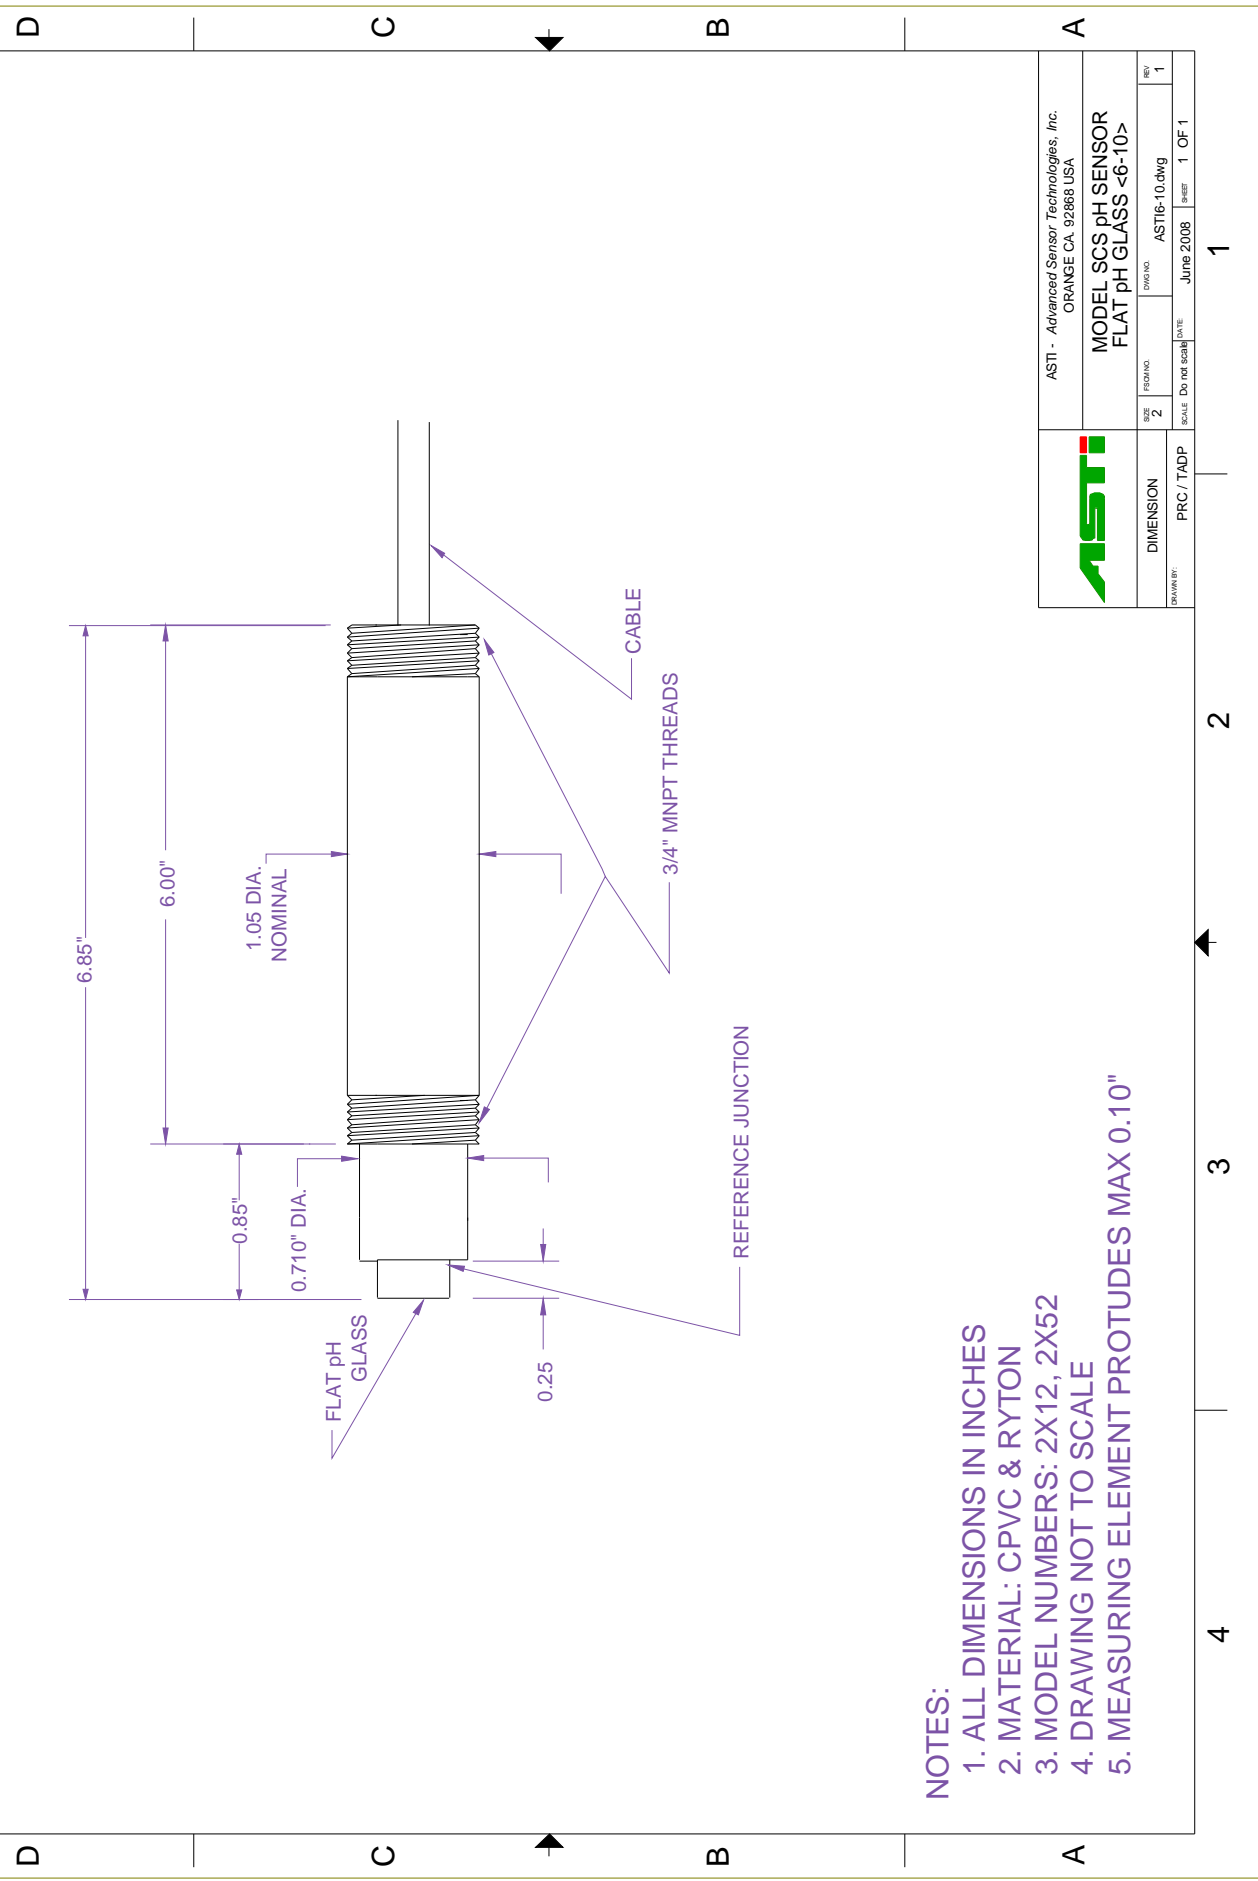

- NOTES:**
1. ALL DIMENSIONS IN INCHES
 2. MATERIAL: CPVC & RYTON
 3. MODEL NUMBERS: 2X12, 2X52
 4. DRAWING NOT TO SCALE
 5. MEASURING ELEMENT PROTRUDES MAX 0.10"

	ASTI - Advanced Sensor Technologies, Inc. ORANGE CA. 92668 USA	
	MODEL SCS pH SENSOR FLAT pH GLASS <6-10>	
DIMENSION	SIZE	DATE
PRC / TADP	2	June 2008
SCALE	Do not scale	SHEET 1 OF 1

1 2 3 4