




IOTRON™ SENSORS

INTEGRATED ORP SPECIFICATIONS

<u>Part Number:</u>	6842
<u>Configuration:</u>	3/4" – 3/4" MNPT Integrated, General Purpose ORP Sensor
<u>General Specifications:</u>	
<u>mV Range:</u>	-2000 to +2000 mV
<u>Temperature Range:</u>	-5 to 105 ° C
<u>Pressure Range:</u>	1 to 150 psia (6.9 to 1,035 kPa absolute)
<u>Body Material:</u>	PEEK (Poly-Ether-Ether-Ketone)
<u>Junction Material:</u>	Kynar (Poly-Vinylidene-Fluoride)
<u>Dimensions:</u>	Drawing <6-5-Pt>
<u>Cable:</u>	RG 174/U Coaxial (without preamplifier)
<u>Connector:</u>	BNC (unless otherwise specified)
<u>ORP Sensor Specifications:</u>	
<u>Measuring Glass Type:</u>	Hemispherical Glass with high purity Pt band
<u>Dimensions:</u>	0.310/0.185, (7.8/4.7 mm) DIA
<u>Reference System Specifications:</u>	
<u>Type:</u>	Double Junction
<u>Reference Half Cell:</u>	Ag/AgCl, Saturated KCl
<u>Primary Junction:</u>	Porous Ceramic, Saturated with KCl in crosslinked polymer
<u>Secondary Junction:</u>	Porous Kynar, Saturated with KCl in crosslinked polymer
<u>Surface Area:</u>	366,000 mil ² (236 mm ²)
<u>Special Features:</u>	Body (PEEK) and reference junction materials (Kynar) and crosslinked polymer is resistant to heat, solvents and to most chemicals. Sensor holds an excess of KCl, assuring saturation at all temperatures and extending in situ sensor life. The reference system holds a generous supply of aqueous saturated KCl, eliminating effects of intruding contaminants and permits the sensor to be left in dry condition for extended periods of time.
<u>Recommended Applications:</u>	Plating baths, plating wastewater treatment, chemical processes, pollution control, measurements where long service life or operation at remote locations where (no) low maintenance is required.
<u>Storage and Shelf Life:</u>	At room temperature with closed protector cap, 1 year from date of manufacture.
<u>Standard Hook-Up Options:</u>	No Preamp - BNC Connector + TC lead wires With Preamp – Multiconductor Lead Wires – See Hook Up Schematics

1 2 3 4

REVISONS		DATE	APPROVED
ZONE	REV		
2	1		

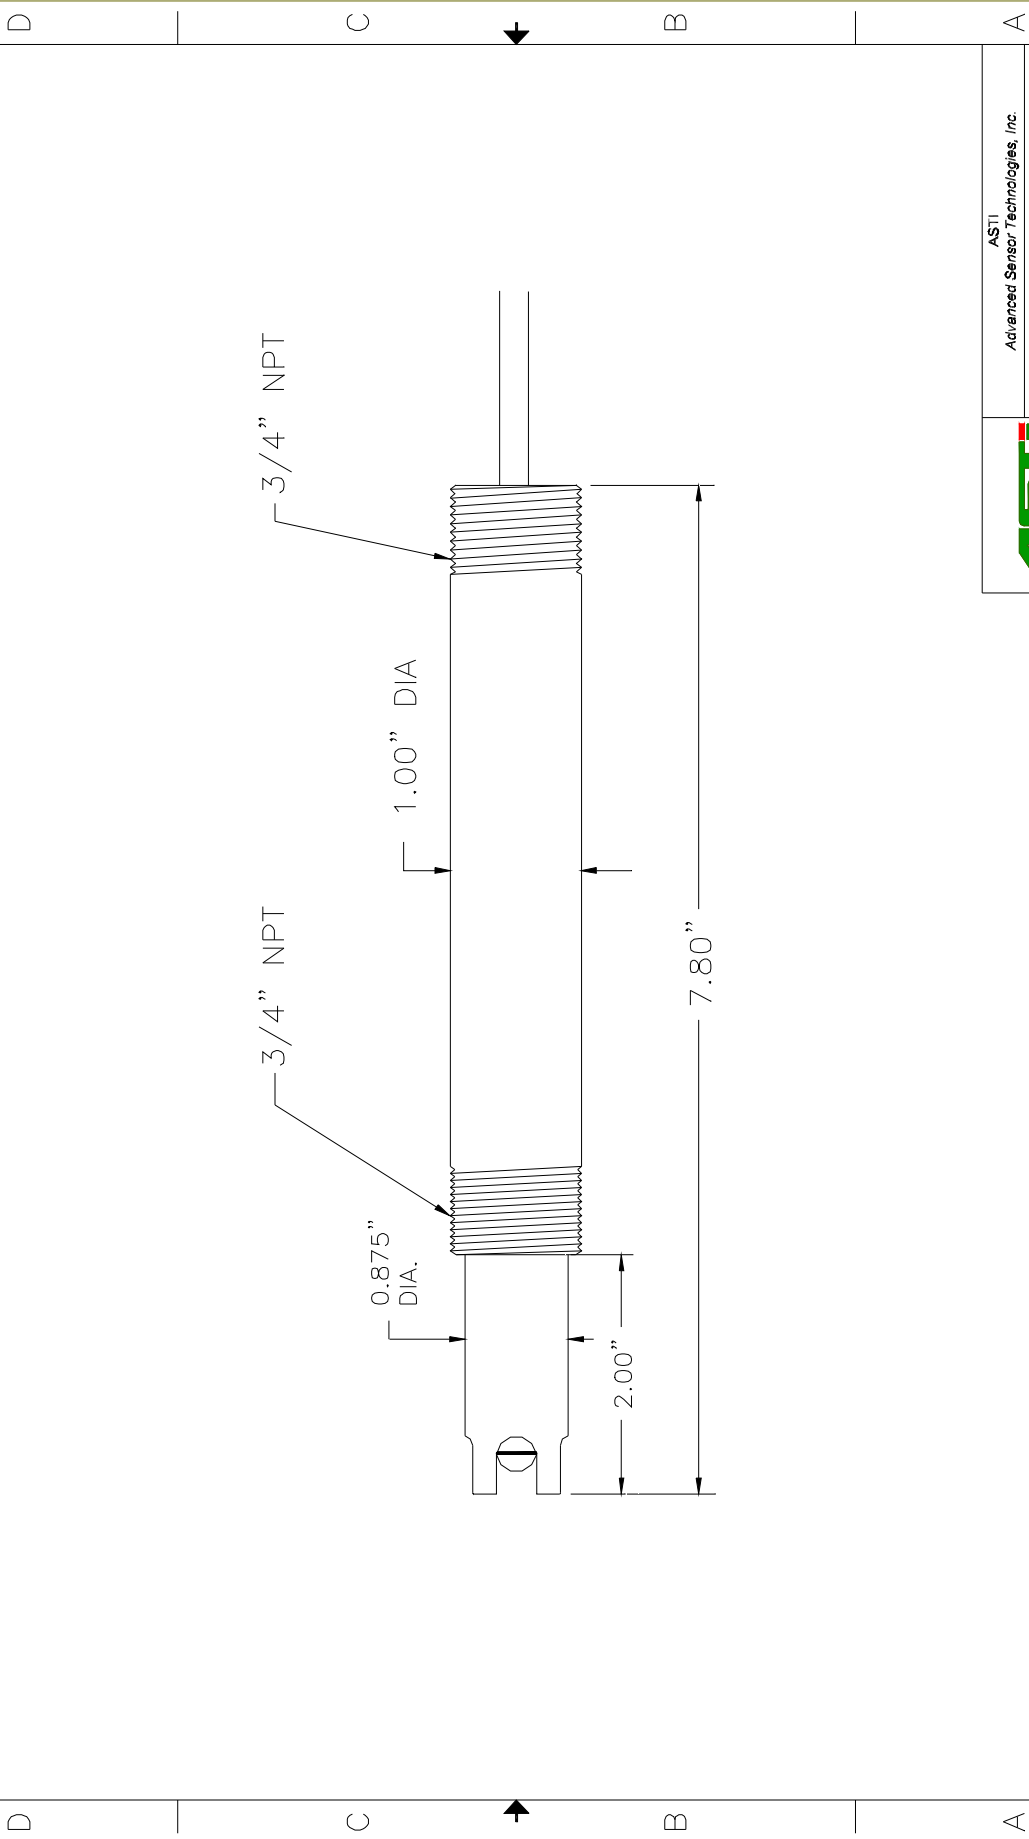

ASTI Advanced Sensor Technologies, Inc.		ASTIG-SPLDNG	
INTEGRATED ORP SENSOR			
REF. DRAWING <6-5-Pt>			
SIZE	WEB NO.	DWG NO.	REV
2	#<6-5>-Pt	ASTIG-SPLDNG	1
DIMENSION		DATE: MARCH, 2003	
DRAWN BY: PETE CSISZAR		SHEET 1 OF 1	

1 2 3 4