


<u>Part number:</u>	AB 8450
<u>Configuration:</u>	1" Twist Lock, Integrated Magnesium Ion Selective Sensor
<u>General Specifications:</u>	
<u>Concentration Range:</u>	1 to 5×10^{-6} Molar, 24,300 - 0.121 ppm
<u>Lowest Limit of Detection:</u>	5×10^{-7} Molar, .012 ppb
<u>pH Range:</u>	2.5 to 11
<u>Temperature Range:</u>	5 to 40 °C
<u>Pressure Range:</u>	1 to 10 psig (6.9 to 69 kPag)
<u>Body Material:</u>	Ultem (Poly-Ether-Imide)
<u>Junction Material:</u>	Kynar (Poly-Vinylidene-Fluoride)
<u>Dimensions:</u>	Drawing <8-2>
<u>Cable:</u>	RG 174/U Coaxial (without preamplifier)
<u>Connector:</u>	BNC (unless otherwise specified)
<u>Ion Sensor Specifications:</u>	
<u>Measuring Membrane:</u>	Selective Magnesium Sensitive Membrane (organic)
<u>Dimensions:</u>	0.310, (7.8 mm) DIA
<u>Initial Impedance:</u>	Less than 100 M Ohms @ 25 °C
<u>Interfering Ions: (given in permissible ratios of excess)</u>	Na^+ (3×10^4), K^+ (2×10^3), Ca^{+2} (20)
<u>Reference System Specifications:</u>	
<u>Type:</u>	Double Junction
<u>Reference Half Cell:</u>	Ag/AgCl, Saturated NaCl
<u>Primary Junction:</u>	Porous Ceramic, Saturated NaCl in crosslinked polymer
<u>Secondary Junction:</u>	Porous Kynar, Saturated with NaCl in crosslinked polymer
<u>Surface Area:</u>	366,000 mil ² , (236 mm ²)
<u>Special Features:</u>	<p>Crosslinked polymer in the reference system is resistant to heat, solvents and to most chemicals. Sensor holds an excess of NaCl assuring saturation at all temperatures and extending the life of the sensor.</p> <p>The sensor is designed to resist the interactions of various ions and many solvent in chemical and biochemical processes.</p> <p>The construction of the sensor permits easy access to the sensing and reference surfaces for cleaning or inspection.</p>
<u>Recommended Applications:</u>	Potassium ion concentration in aqueous solution from ultrapure water through waste water to industrial, organic or biomedical process solutions.
<u>Storage and Shelf Life:</u>	At room temperature with closed protector cap, 1 year from date of manufacture.
<u>Standard Hook-Up Options:</u>	No Preamp - BNC Connector + TC lead wires With Preamp – Multiconductor Lead Wires – See Hook Up Schematics

4 3 2 1

REVISIONS		
ZONE	REV	DESCRIPTION
2	1	
		DATE
		APPROVED

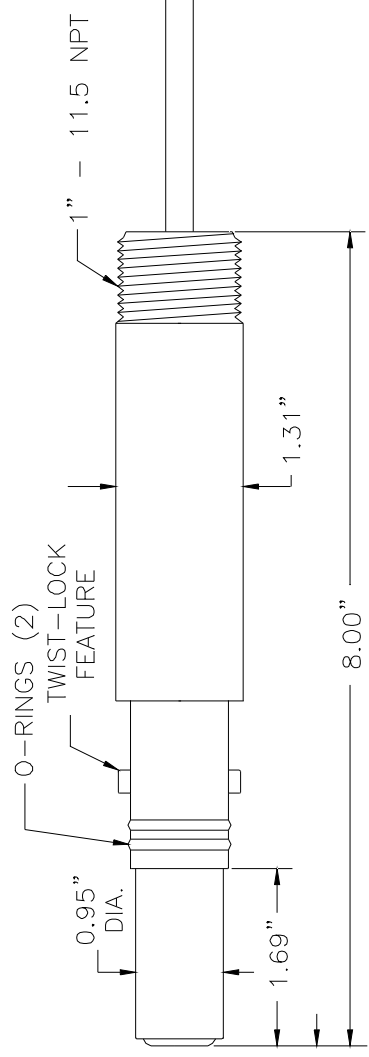

D C B A



ASTI
Advanced Sensor Technologies, Inc.
ION SELECTIVE SENSOR
REF. DRAWING <8-2>

SIZE	WEB NO.	DWG NO.	DATE	REV
2	#<8-2>	ASTIAB8-2.DWG	MARCH, 2003	1
DRAWN BY: PETE CSISZAR				SCALE: NONE
				SHEET 1 OF 1

4 3 2 1