



IOTRON™ SENSORS

INTEGRATED INDUSTRIAL ION SELECTIVE SENSOR SPECIFICATIONS

<u>Sensor Part Number & Short Description:</u>	AB 6100H – Fluoride (F⁻) Industrial Ion Selective (ISE) Inline, Immersion & Submersible Sensor; ¾" MNPT for Inline & 1" MNPT for Immersion/Submersible Use
<u>Configuration Type:</u>	<i>Interface with ¾" FNPT threads of tee or process tank for Inline Use or 1" FNPT threads on insertion tube for immersion or waterproofing seal for submersible installations</i>
<u>General Sensor Specifications:</u>	
Operating Temperature Range:	+5 to +50 °C Continuous
Operating Pressure Range:	1 to 20 psig (6.9 to 138 kPa) with ¾" MNPT Front Threads for Inline Installations
Sensor Body Material:	RADEL® R-5000 NT (Poly-Phenyl-Sulfone, PPSU)
Junction Support Matrix Material:	High-Density Polyethylene (HDPE) Standard KYNAR® (Poly-Vinylidene-Fluoride, PVDF) Optional
External Dimensions:	See Drawing 6-ISE
<u>ISE Measurement Specifications:</u>	
Linear Measurement Range:	0.019 to 19,000 ppm (1X10 ⁻⁶ to 1.0 Molar)
Lowest Limit of Detection	0.001 ppm (5X10 ⁻⁸ Molar)
Interfering Ion(s):	OH ⁻ when pH is above 12.0
Suitable pH range:	5.5 to 9.5 *
<i>Cases where AB 6100 must be used:</i>	* If pH is below 5.5 or above 9.5 then the AB 6100 sensor must be used instead.
ISE Sensing Element Dimensions:	0.315" (8mm) DIA active sensing region, 0.472" (12 mm) DIA overall sensing electrode
Initial Impedance:	< 20 MΩ @ 25 °C
<u>Reference System Specifications:</u>	
Type:	Double Junction Standard (Triple Junction Optional, Alpha Prefix "TJ")
Reference Half Cell:	Ag/AgCl, Saturated KCl
Primary Junction:	Porous Ceramic, Sat. KCl in crosslinked polymer, Interfaced to Secondary Junction
Secondary Junction:	Solid-State Non-Porous Cross-Linked Polymer embedded in HDPE/KYNAR Support Matrix holds excess KCl assuring saturation at all temps for stability & long sensor life
<u>Supported Order Options with Alpha Prefix Order Code Designation:</u>	3-Wire TC ("M"), ACCU-TEMP Fast Response TC ("X"), Two each Protective Tines Configuration ("GRO"), No Protective Tines ("NG"), Shielded Preamp Cable ("BL")
<i>Inquire to factory for specials</i>	
<u>Example Recommended Applications:</u>	Municipal potable water and water treatment facilities (POTW) for monitoring and/or control of fluoridation process. Industrial facilities required to monitor and/or treat the fluoride ion level prior to discharge for compliance and other environmental remediation. Environmental monitoring in rivers, lakes and ponds for public health and safety. Any free fluoride ion measurement that needs to operate with minimal cleaning & recalibration frequency (i.e. remote sites that are unattended for long periods of time). Solid-state fluoride monocrystal and conductive-polymer reference system allows for extremely low cost-of-ownership without any costly reagents or sample conditioning.
<u>Storage and Shelf Life:</u>	One (1) year from date of dispatch from factory when stored at indoor ambient room temperature with proper orientation & protector cap.
<u>Available Configurations & Options:</u>	
Integrated Components:	- Pt1000 Temperature Compensation Element - Analog Conventional Preamplifier (Optional for noisy areas and/or long cable runs)
Analog Sensors without integral preamplifier:	Terminated with Tinned Lead Wires (-TL)
Analog Sensors with integral preamplifier:	Terminated with Tinned Lead Wires (-TL) or Quick Disconnect NEMA 6P Snap (-Q7M)

1

2


3

REVISION HISTORY		
REV	DESCRIPTION	DATE

DESCRIPTION

DATE

APPROVED

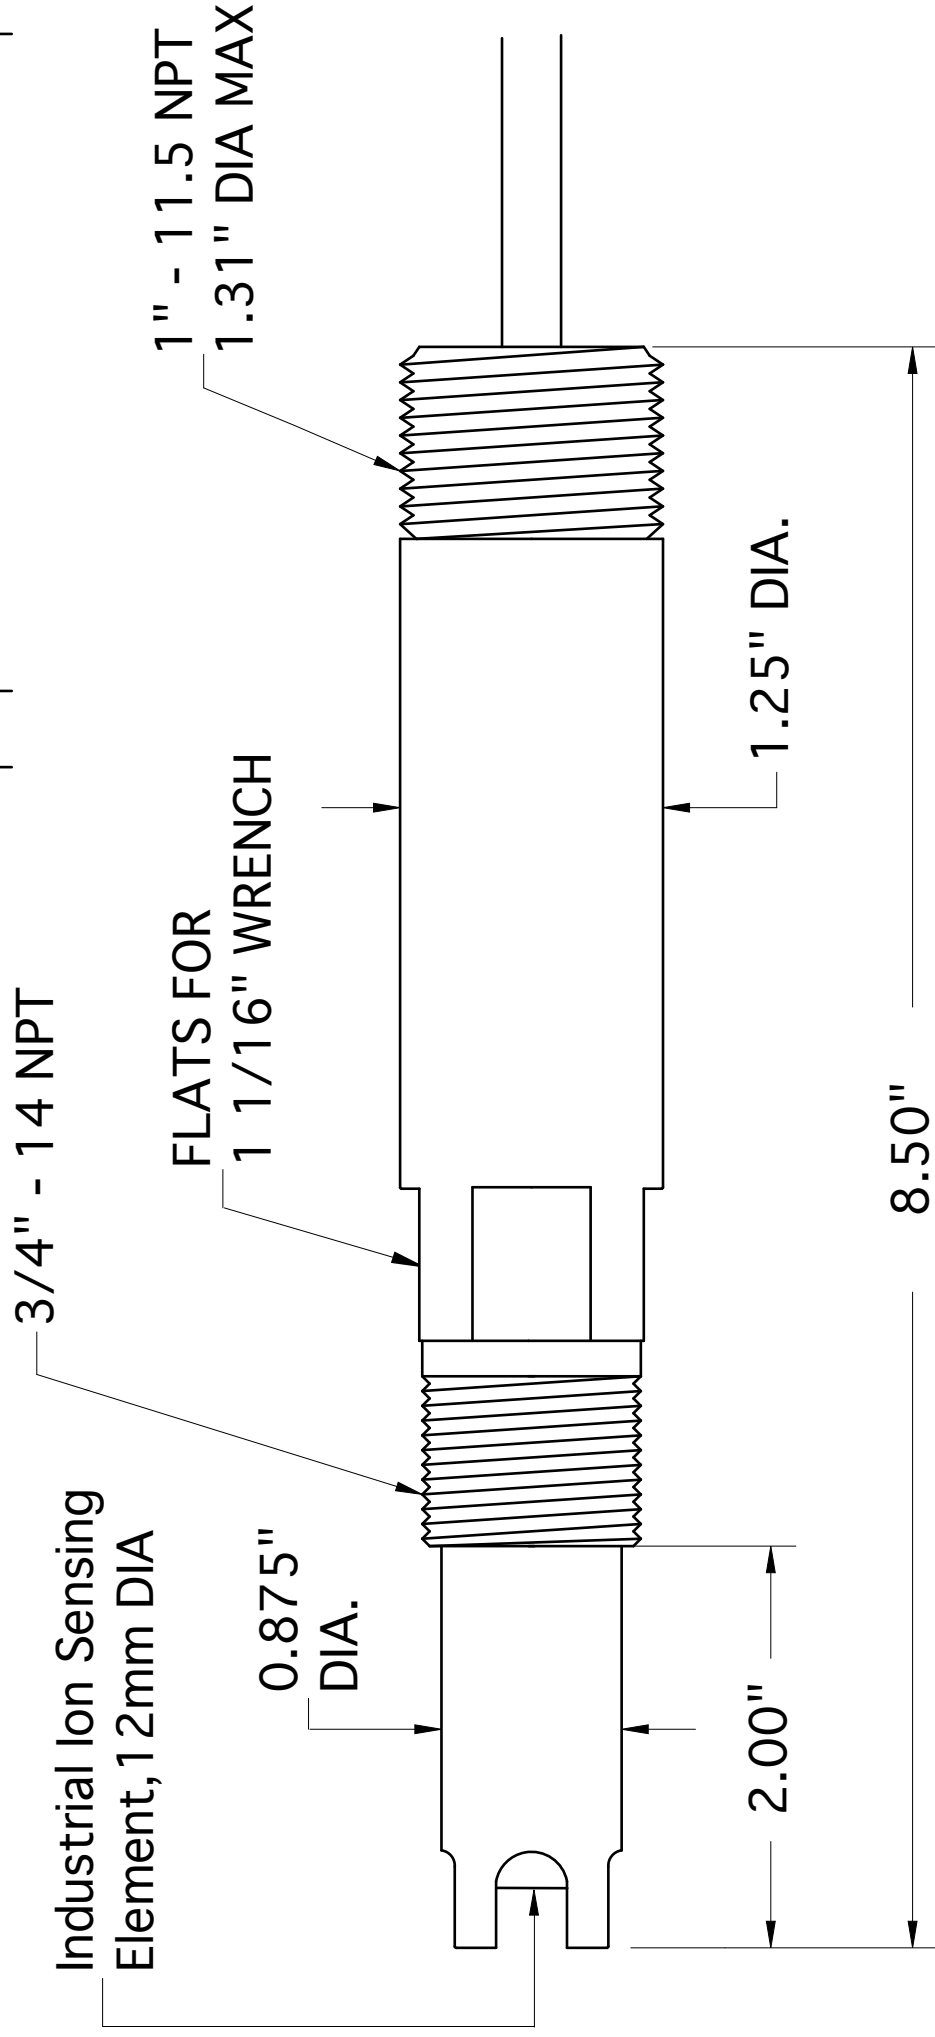

A

A

NOTES

1. All dimensions are in inches, unless otherwise indicated with tolerances as detailed below
2. Sensor body material of construction is RADEL for all 6XX0 series ion selective (ISE) models
3. Drawing shown in the standard with protective tines configuration (4 places, 90 degrees apart).
The 2 protective tines only "GRO" configuration (2 places, 180 degrees apart) is optional.
4. In the alternate without tines configuration ("NG") the sensor body is exactly 8.0 inches in length.
The max displacement for Ion Sensing Element is 0.2" yielding a max insertion depth of 1.7 inches past threads & overall max length of 8.2 inches.
5. Do not use any sensor beyond the factory defined maximum temperature or pressure rating.

B

B



Advanced Sensor Technologies U.S.A.
Website: <http://www.astisensor.com>

TITLE		3/4"-1" MNPT Inline / Immersion / Submersible	
SIZE	PROJECT	DRAWING NO.	REV
B	IMMERSION	6-ISE Ion Selective Sensor	/
SCALE Not to Scale		MODEL 6XX0	SHEET 1 OF 1

TOLERANCES

DRAWN BY RH
CHECKED BY TADP
APPROVED BY MJP

1 Place: ± .1	3 Places: ± .005
2 Places: ± .01	4 Places: ± .0005
Angular: ± 0.25°	

1

2

3